



RAF SST

FILTRO A MANICHE IN LAMIERA ZINCATA CON PULIZIA CON VIBRATORE
GALVANIZED IRON SHEET BAGS FILTER WITH VIBRATOR CLEANING



SETTORI DI IMPIEGO

- > Applicazioni con stoccaggio di grandi quantità di prodotto di scarto delle lavorazioni del legno e di prodotti polverosi
- > Impianti centralizzati per il settore legno dove si vuole evitare il silos di stoccaggio
- > Soluzioni per convogliare prodotti di scarto in container scarrabili

CARATTERISTICHE TECNICHE

- > Robusta costruzione in lamiera zincata
- > Pulizia delle maniche con vibratore
- > Maniche filtranti ad estrazione frontale o superiore
- > Sistema di scarico con coclea e rotovalvola motorizzate
- > Predisposizione sistema di trasporto pneumatico su scarico materiale
- > Disponibile in esecuzione Atex 22

FORNITURA DI SERIE

- > Maniche in poliestere Ø 200 mm, 350 gr/m²
- > Coclea e rotovalvola motorizzate
- > Sistema di miscelazione sullo scarico rotovalvola con micro per segnalazione intasamento tubo

AREAS OF USE

- > Applications where is necessary to storage large quantities of waste product from woodworking and powdery products
- > Centralized systems for the wood sector where is necessary to avoid the storage silos
- > Solutions for conveying waste in roll-off containers

TECHNICAL FEATURES

- > Strong construction in galvanized iron sheet
- > Automatic bag cleaning with vibrator
- > Filter bags with front or top extraction
- > Discharge with motorized screw and rotary valve
- > Discharge system for pneumatic conveying
- > Atex 22 execution optional

STANDARD SUPPLY

- > Bags in polyester Ø 200 mm, 350 gr/m²
- > Motorized screw and rotary valve
- > Air mixing system under rotary valve with micro to indicate clogging of the pipe

DATI TECNICI | TECHNICAL DETAILS


Modello Models	Maniche Bags n	Ø maniche Bags Ø mm	Altezza maniche Bags height mm	Altezza sotto flangia coclea Height under screw flange mm	Superficie filtrante Filtering surface m ²	Dimensioni Dimensions L x P x H mm
SST/R/C/80/GC	80	200	2500	850	126	2450 x 2500 x 6500
SST/R/C/120/GC	120	200	2500	850	188	3700 x 2500 x 6500
SST/R/C/160/GC	160	200	2500	850	251	4300 x 2500 x 6500
SST/R/C/200/GC	200	200	2500	850	314	5500 x 2500 x 6500
SST/R/C/240/GC	240	200	2500	850	377	6700 x 2500 x 6500
SST/R/C/280/GC	280	200	2500	850	440	7900 x 2500 x 6500
SST/R/C/320/GC	320	200	2500	850	502	8500 x 2500 x 6500
SST/R/C/360/GC	360	200	2500	850	565	9700 x 2500 x 6500
SST/R/C/400/GC	400	200	2500	850	628	10900 x 2500 x 6500
SST/R/C/440/GC	440	200	2500	850	691	12100 x 2500 x 6500

L'idoneità della tipologia di filtro, della portata d'aria e del tipo di pulizia devono essere verificate in funzione di eventuali restrizioni normative vigenti nel luogo di installazione.
The suitability of the type of filter, the air flow rate and the type of cleaning must be checked according to any regulatory restrictions in force in the place of installation.

SST/R/C/GL: Versione con gambe lunghe (+ 1150 mm in altezza) | Version with long legs (+ 1150 mm in height)

SST/R/C/ATEX: Versione ATEX 22 | ATEX 22 version

FUNZIONAMENTO | OPERATING

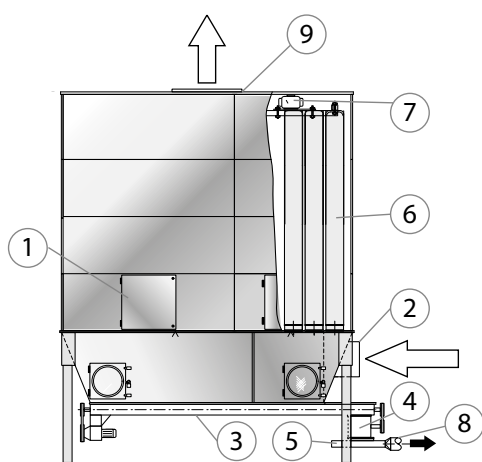

1. Portello di ispezione | Maintenance door
2. Entrata aria | Air inlet
3. Coclea Ø 200 | Screw Ø 200
4. Rotovalvola | Rotary valve
5. Miscelazione aria | Air mixing
6. Maniche filtranti | Bags
7. Vibratore | Vibrator
8. Trasporto pneumatico | Pneumatic conveying
9. Uscita aria | Air outlet

OPTIONAL

- > Indicatore di livello
- > Indicatore di livello a paletta 24 Vac, Atex Ex II 3GD
- > Esecuzione Atex 22
- > Venturi con microinterruttore per trasporto pneumatico
- > Struttura porta Big Bag
- > Set di 4 bilanciatori portata 1,5 - 3 kg per bretelle Big Bag

OPTIONAL

- > Level indicator
- > 24 Vac paddle level indicator, Atex Ex II 3GD
- > Atex 22 execution
- > Venturi with microswitch for pneumatic transport
- > Big Bag holder structure
- > Set of 4 balancers with 1.5 - 3 kg capacity for Big Bag shoulder straps

RICAMBI | SPARE PARTS

Codice Code	Descrizione	Description
POL/BIGBAG	Sacchi di smaltimento BIG BAG	BIG BAG disposal bags
MAN/RP/20/25	Manica in raso poliestere Ø 200 mm, ht. 2500 mm	Polyester satin sleeve Ø 200 mm, ht. 2500 mm
MAN/RP/20/25/A	Manica in raso poliestere antistatico Ø 200 mm, ht. 2500 mm	Antistatic polyester satin sleeve Ø 200 mm, ht. 2500 mm

REALIZZAZIONI | IMPLEMENTATIONS

